

ProxPro® Reader

125 kHz Proximity

125 kHz Versatile Proximity Card Reader
5355 (Wiegand), 5352 (Serial), 5358 (Clock-and-Data)



ACCESS reliability.

Application

The ProxPro® proximity card reader's weatherproof design and architecturally attractive enclosure allows easy mounting indoors or out. The ProxPro Reader is ideal for applications requiring a larger read range.

Features

- ▶ Affords high reliability, consistent read range characteristics, and low power consumption in a single, easy-to-install package.
- ▶ Features multicolor LED, internal or host control of the LED, and/or beeper and a beeper "off" switch for silent operation.
- ▶ Provides Wiegand protocol interface compatibility with all standard access control systems.
- ▶ Offers an optional, fully integrated personal identification number keypad for heightened security.
- ▶ Can be mounted to glass (using the optional glass mounting kit).
- ▶ For a longer read range, try the new generation ProxPro II Reader, which provides an additional inch (2.5 cm) of read range, requires just 5 volts for operation, and is lower-priced than the ProxPro Reader!

Features

Specifications

Mounting	Mounting holes fit standard U.S.A. single-gang switch boxes (vertically mounted) to simplify installation. Field adjustable for mounting directly to metal, exhibiting only minimal effects on read range. A selectable jumper setting provides for improved performance.
Audiovisual Indication	When a proximity card is presented to the reader, the red LED flashes green and the beeper sounds. The multicolor LED and beeper can also be controlled individually by the host system.
Diagnostics	On reader power-up, an internal self-test routine checks and verifies the setup configuration, determines the internal or external control of the LED and beeper, and initializes the reader's operation. An additional external loop-back test allows the reader outputs and inputs to be verified without the use of additional test equipment.
Indoor/outdoor Design	Sealed in a rugged, weatherized polycarbonate enclosure designed to withstand harsh environments, providing reliable performance and a high degree of vandal resistance. Easily installed in any location, even with the optional keypad.
Easily Interfaced	Interfaces with all existing Wiegand protocol access control systems. Output data in Wiegand or Clock-and-Data format, plus optional RS232 and RS422 serial interfaces.
Security	Includes a tamper switch to provide notification of reader tampering. Recognizes card formats up to 84 bits, with over 137 billion unique codes. *Except Model 5352 which supports up to 37-bit formats.
Keypad Option	Available with an optional, integrated weatherized keypad, which provides an additional level of security by allowing the use of a personal identification number (PIN). The keypad interfaces with the host system either by sending the keypad data over the data output lines, or via a direct connection to the host keypad interface.
Warranty	Warranted against defects in materials and workmanship for life from date of shipment. (See complete warranty policy for details.)
Part Numbers	Base Part No.: 5355 Wiegand Interface/Clock-and-Data (configurable) Description: Wiegand interface, tri-state LED, internal beeper on Options: <ul style="list-style-type: none">• Color (gray or beige)• Keypad operation • LED and beeper operation• Custom label Glass Mount Kit: 5455AGM00 Base Part No.: 5352 Serial Interface Description: RS-232 or RS-422 Serial interface (configurable), tri-state LED, internal beeper on. Options: <ul style="list-style-type: none">• Color (gray or beige)• Keypad operation• Custom label Glass Mount Kit: 5455AGM00

Typical Maximum* Read Range

ProxCard® II card - up to 8" (20 cm)
ISOProx® II card - up to 7" (17.5 cm)
DuoProx® II card - up to 7" (17.5 cm)
Smart ISOProx® II card - up to 7" (17.5 cm)
Smart DuoProx® II card - up to 7" (17.5 cm)
HID Proximity & MIFARE® card - up to 7" (17.5 cm)
ProxCard® Plus card - up to 3" (7.5 cm)
ProxKey® II keyfob - up to 3" (7.5 cm)
MicroProx® Tag - up to 4" (10.2 cm)
ProxPass® Active Vehicle Tag - N/A

*Depending on local installation conditions.

Dimensions: 5.0" x 5.0" x 1.0" (12.7 x 12.7 x 2.54 cm)

Material: Polycarbonate UL 94

Power supply: 10-28.5 VDC; Linear power supplies recommended. Reverse voltage protection included.

Current requirements: Average: 100 mA (12 VDC)
Peak: 120 mA (24 VDC)

Operating temperature: -22° to 150° F (-30° to 65° C)

Operating humidity: 0-95% relative humidity non-condensing

Weight: 12 oz. (336 gm)

Transmit frequency: 125 kHz


Excite frequency: 125 kHz

Cable distance:

Wiegand or Clock-and-Data interface: 500 feet (152 m)
RS-232 interface: 50 feet (15 m)
RS-422 interface: 4000 feet (1219 m)
Recommended cable is ALPHA 1295 (22 AWG) 5 conductor stranded with overall shield or equivalent. Additional conductors may be required for LED or beeper control. RS-422 requires ALPHA 6212C 2-Twisted Pair, shielded cable with drain wire, or equivalent for data, plus ALPHA 1292C two-conductor shielded or equivalent for DC power.

Certifications:

Canada/UL 294 Listed: Access Control System Units
FCC Certification, United States, Canada Certification
CE Mark, Fifteen EU Countries under the R&TTE Directive (EN60950 - ITE Electrical Safety, EN 300 330 - SRD, and ETS 300 683 - EMC), IEC60950, ITE CB Scheme Electrical Safety, Australia C-Tick Mark, New Zealand EMC, China, Taiwan (5355 only)

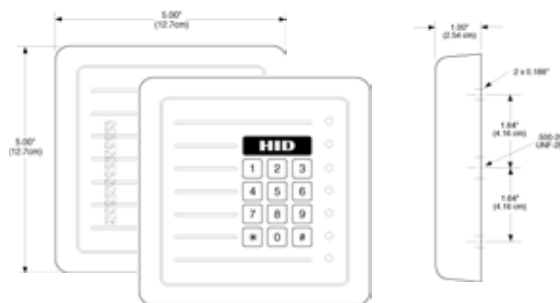

© 2007 HID Global. All rights reserved. HID, and the HID logo are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. Rev. 4/2007



For best results, please print on recycled paper.

MKT-PROXPRO_DS_EN



ACCESS experience.

hidcorp.com

HID Global Offices:

Corporate North America
9292 Jeronimo Road
Irvine, CA 92618-1905
U.S.A.
Phone: (800) 237-7769
Phone: (949) 598-1600
Fax: (949) 598-1690

Asia Pacific
19/F 625 King's Road
North Point
Island East
Hong Kong
Phone: +852 3160-9800
Fax: +852 3160-4809

Latin America
Circunvalacion Ote. #201 B
Despacho 2
Col. Jardines del Moral
Leon 37160, Gto.
Mexico
Phone: +52 477 779 1492
Fax: +52 477 779 1493

Europe, Middle East & Africa
Homefield Road
Haverhill, Suffolk
CB9 8QP
England
Phone: +44 (0) 1440 714 850
Fax: +44 (0) 1440 714 840